


Winterisation and safety cover 

SKIN Freeze

High quality and under control budget



Opaque cover



Wooden swimming pools



Individual bungee cord fastening



Drainage mesh with seal



Hem finish



Strap reinforcements



Abrasion resistance



NF P 90-308 safety cover




Storage bag



SKIN Freeze

Finish, functionality and long service life.

Design and manufactured in accordance with standard NF P 90-308, the SKIN Freeze safety cover has the advantage of perfect tension once installed.

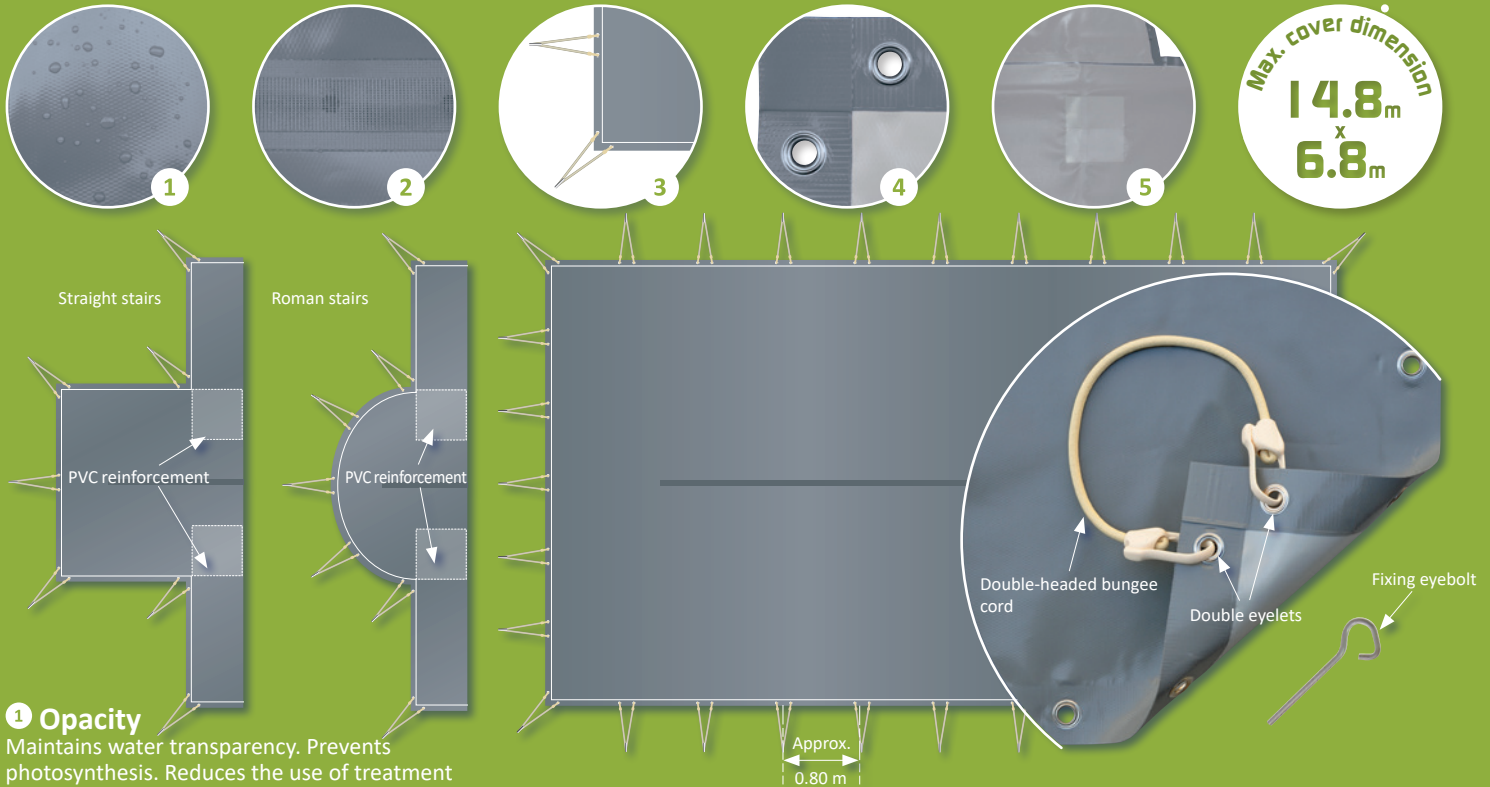

1 Opacity

Maintains water transparency. Prevents photosynthesis. Reduces the use of treatment products. Makes it easier to put your pool back into service.

2 Drainage mesh with

is used to quickly drain off and filter rainwater and avoid pools of water forming, while maintaining the opacity. An effective overflow completes the system.

3 Perfect tension

Its double eyelet fastening system with individual bungee cords and fixing pins gives it impeccable tension once installed.

4 Quality finish and resistance

Full welded reinforcement hem for greater resistance at the eyelets.

5 Welded PVC corner reinforcements

prevent premature wear and tear of the cover on the coping at the inside corners of stairs.


Quick and easy installation

*Production and material against any manufacturing defects within the limit of the maximum dimensions, according to our general conditions of sale. Maximum cover dimensions: 14.8 x 6.8 m (stairs included) for compliance with the standard NF P 90-308.

GUARANTEE*




COLOURS

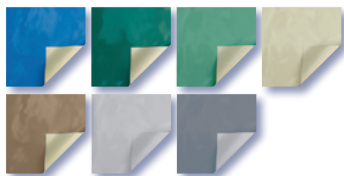

Blue/Ivoire - Green/Ivoire - Amande/Ivoire - Ivoire/Ivoire - Ivoire-Terracotta/Ivoire - Grey/Grey - Dark Grey/Grey

DELIVERED WITH

- PVC storage bag.
- Fixing eyebolts.
- Double-headed bungee cords.



OPTIONS

- Aluminium bushing anchor $\varnothing 10$.
- Wooden pool deck anchors with screws.



IDENTITY CARD

Fabric	Soft PVC reinforced with a polyester weft.
Weight	580 g/m ² .
Breaking strength	2,500 N/5 cm (warp) and 1,800 N/5 cm (weft).
Tear strength	250 N (warp and weft direction).
Treatment	UV, cryptogamic and bacterial.
Assembly	Welding.
Edge finish	5 cm full welded hem.
Overlap in relation to the water body	0.35 m or 0.40 m depending on the width of the coping. If it is ≥ 0.30 m, then 0.40 m overlap, if < then 0.35 m overlap.



Recommended retailer

Nextpool
GROUP